

**PAR-36/AR-111**



M06PAR36-9iD with 45° tilt shown in Deep BusRun.

job name:

fixture type:

**Specify:** **M06PAR36** - - -


FIXTURE MODEL	ADAPTER	FINISH	ACCESSORIES (optional)
example: M06PAR36	-9iD-RL -P		-UVB/w

**Museum Collection Fixtures**

Fits standard 1 13/16" (46mm) and deep 2 3/8" (60mm) BusRun.  
 Fixture rotates up to 360° and may be ordered with an on/off switch. Includes standard tilt & rotation locks.  
 Accessory Cartridge is designed to be remounted in the same position after relamping, maintaining proper orientation of all accessories.

**Lamp**

12-volt, Incandescent  
 PAR-36 or AR-111  
 (by others)



**Ratings**

75 watts maximum



**Features & Dimensions**

**M06PAR36-9iD-RL \* shown:**

\* 9iD – U.S. Patent D499,698

**Flush Fit adapter with Rotation Lock \*\***

Adapter plugs into Busway with separate electrical and mechanical connections. Integrated transformer allows for cooler fixture operation and longer lamp life. Adapter equipped with thumb wheel horizontal rotation lock.

**Stem**

Durable aluminum stem with a 1/2" (13mm)OD, features a constant tension tilt swivel that is mechanically lockable. Aiming angle is 90° maximum.

**Lamp Housing**

Durable aluminum housing contains a lockable accessory cartridge holder. Recessed allen nut located at the rear of the housing rotates lamp socket.

**Lamp Socket**

Specially designed snap-in socket with beryllium copper contacts backed with stainless steel springs. Ceramic socket detaches from lamp housing for lamp replacement and reinstalls with easy action spring clips to insure correct lamp orientation.

**Lenses and Accessories \*\***


Standard 55° x 75° optical pattern spread lens. Optional 5° x 55° spread lens available. Optional UV coating eliminates the need for a separate UV glass. All lenses are keyed for lockable orientation. Photo etched light blocking screens also available.  
 Accessory size code: w

**Accessory Cartridge \*\***

Front installing cartridge is equipped with a spread lens and a specular hammertone alzak reflector and holds additional lenses and light blocking screens.

**Finishes**

Available in a durable powdercoat finish of white or matte black as well as Litelab's natural aluminum. Consult for custom finishes.

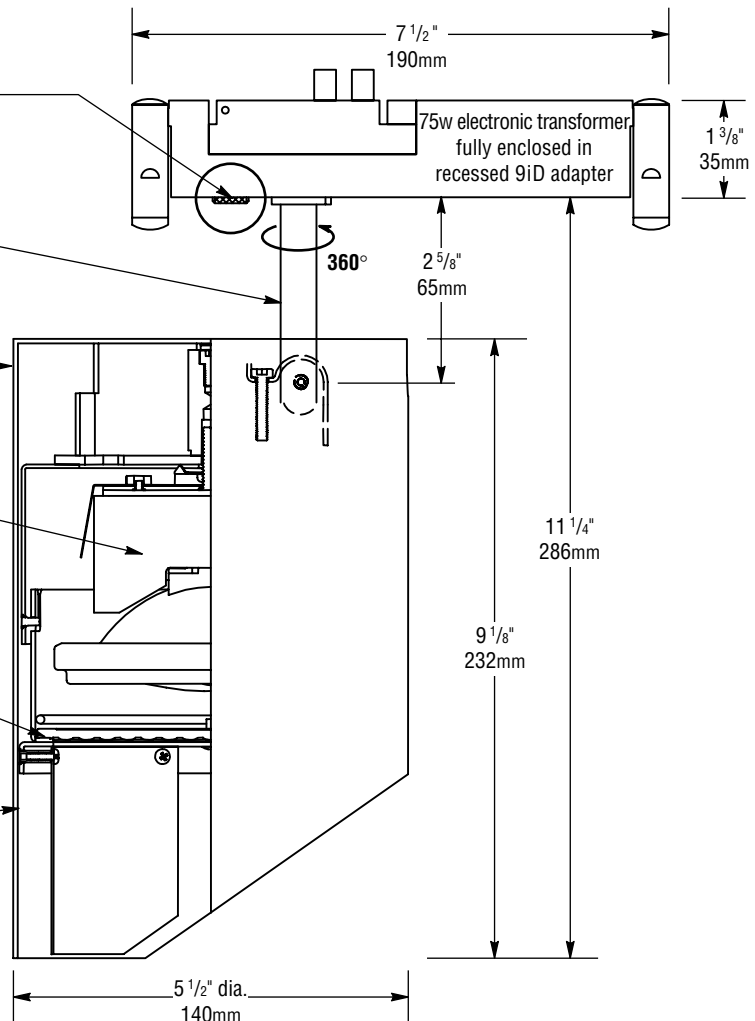

\*\* See fittings and accessories page for mounting options and accessories.

